




Installation Manual



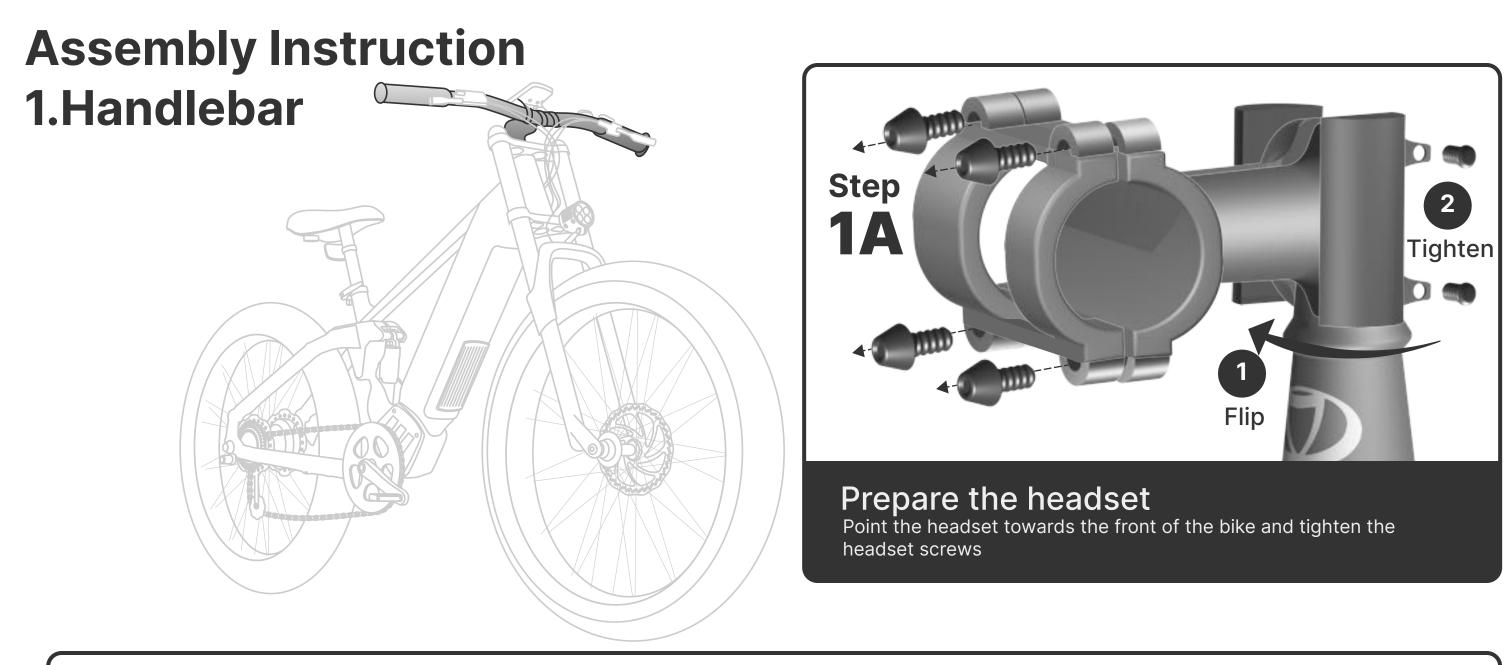


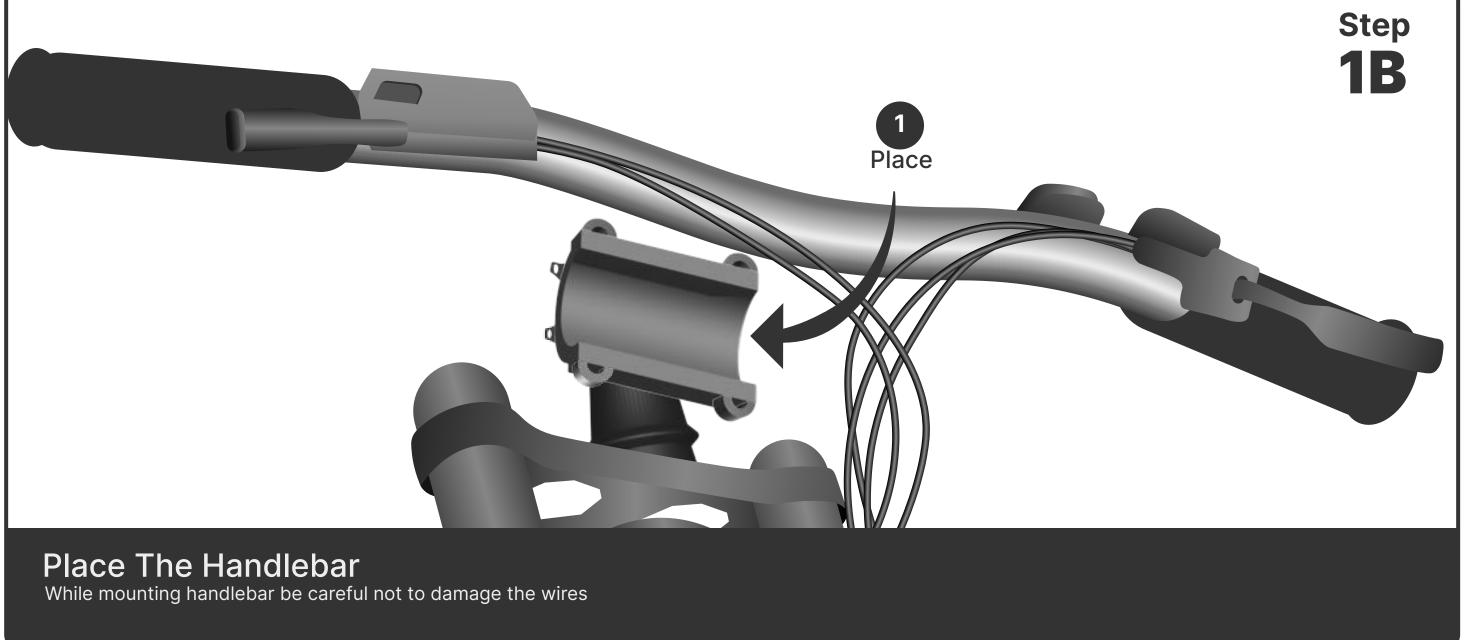

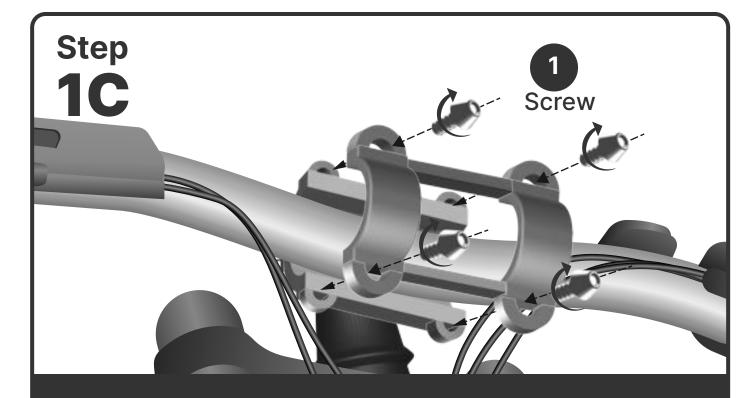


Secure The Handlebar

Face the mounting brackets on the front end of the mount with the round edges facing outward Insert the screws into the screw holes and tighten alternating sides until equally tight

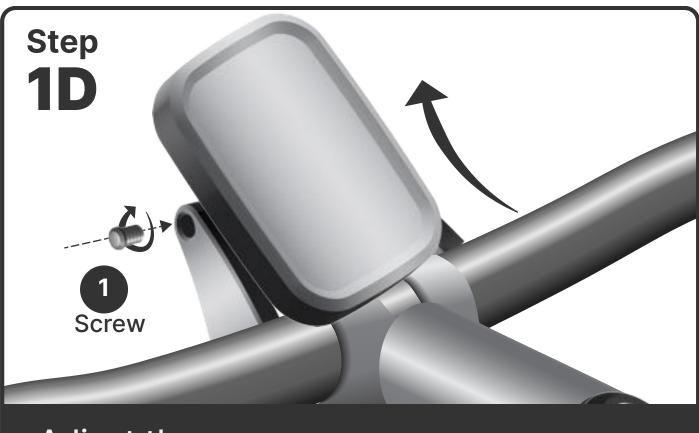

Adjust the screen Adjust the display position to fit your comfortable riding posture

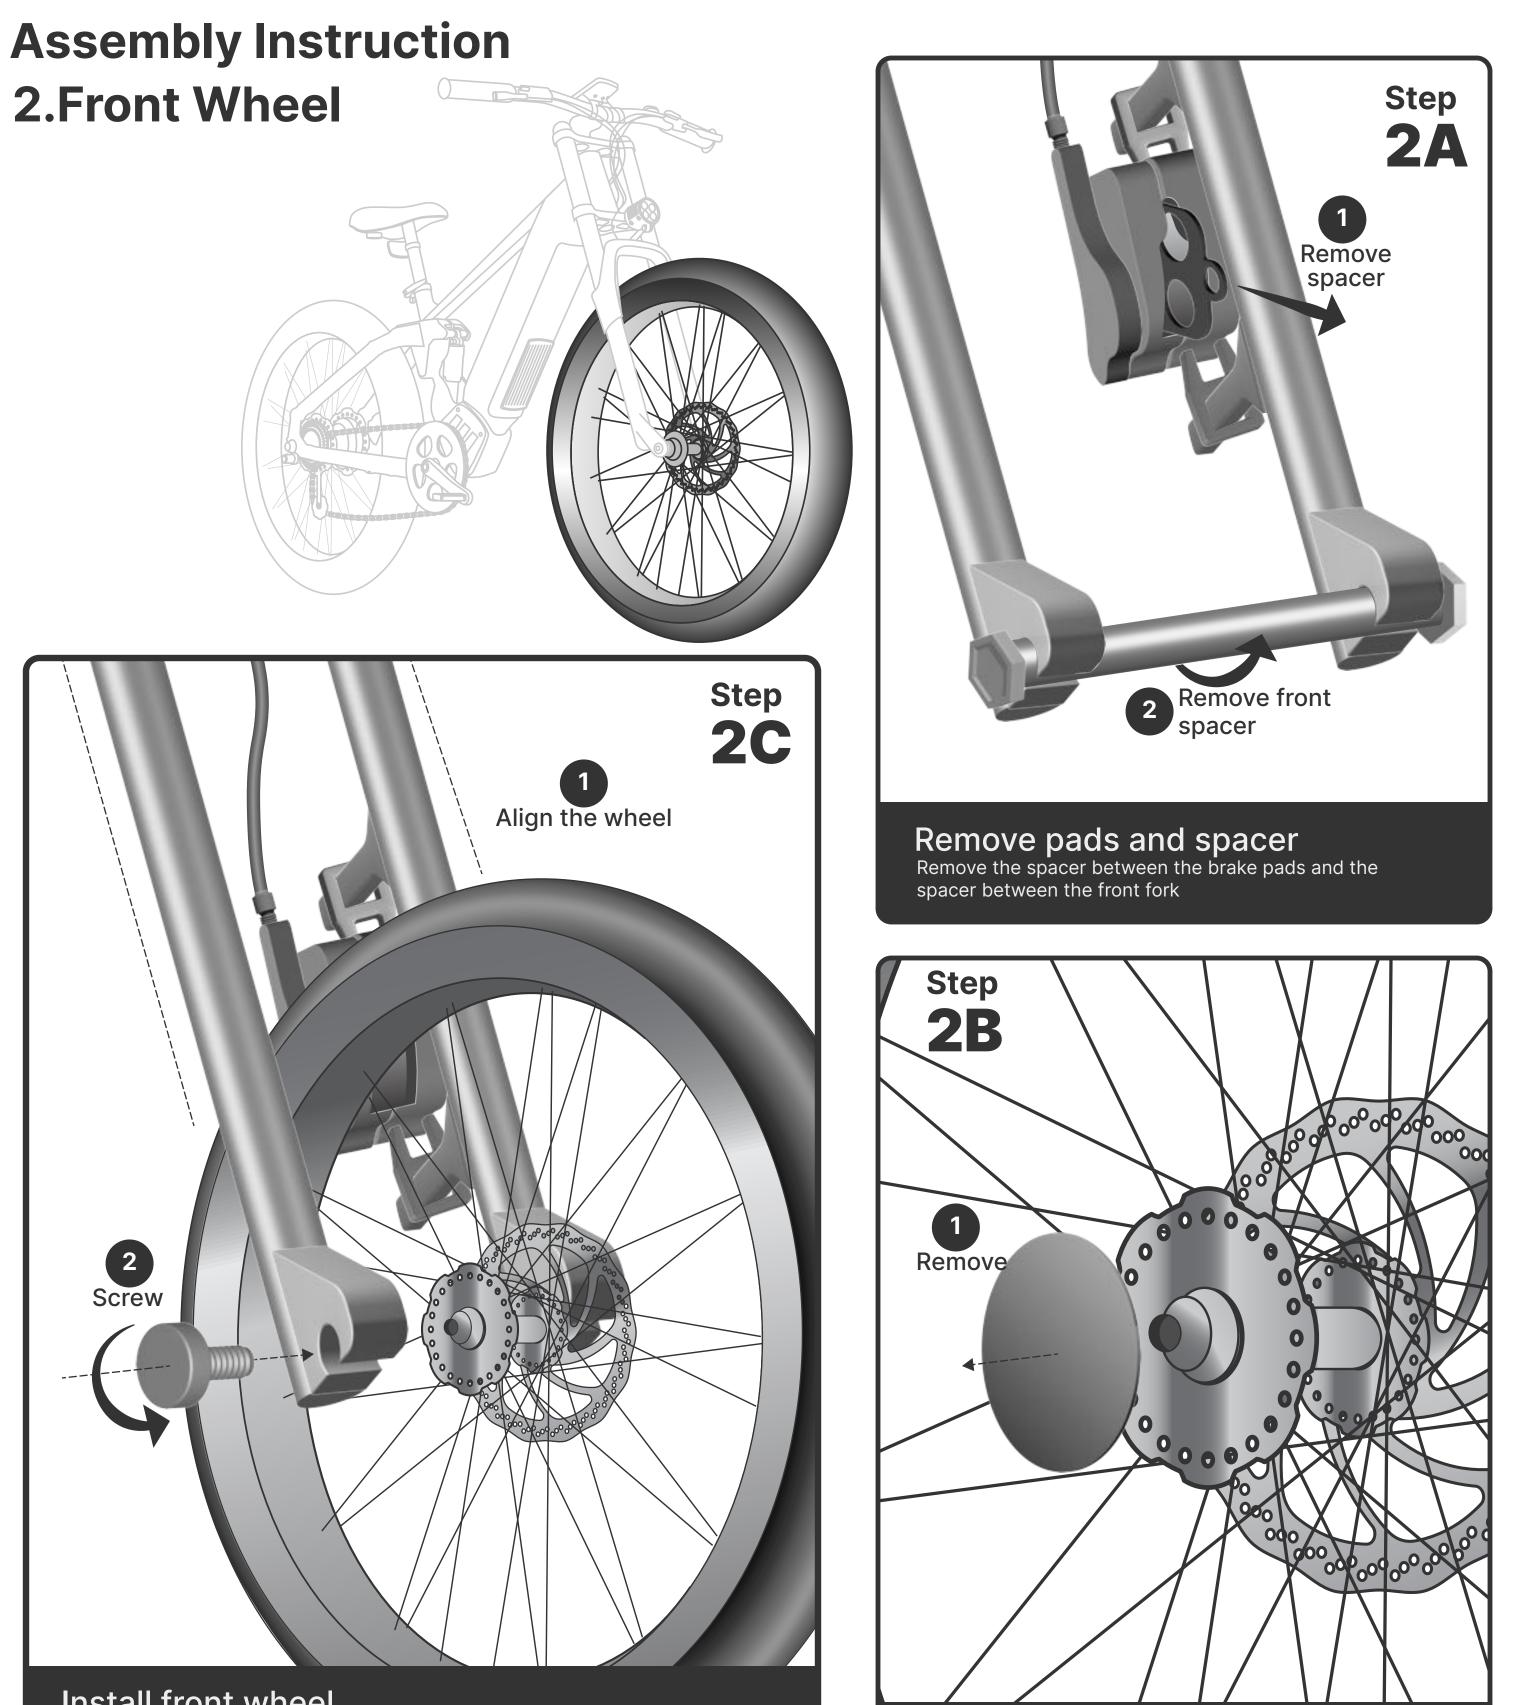


Install front wheel

Insert the front wheel, aligning the disc between the brake pads. Add the spacer (teeth side in), washer, and end nut on each side. Hand-tighten, then fully tighten with a wrench.

Remove cap Remove the cap on the wheel hub



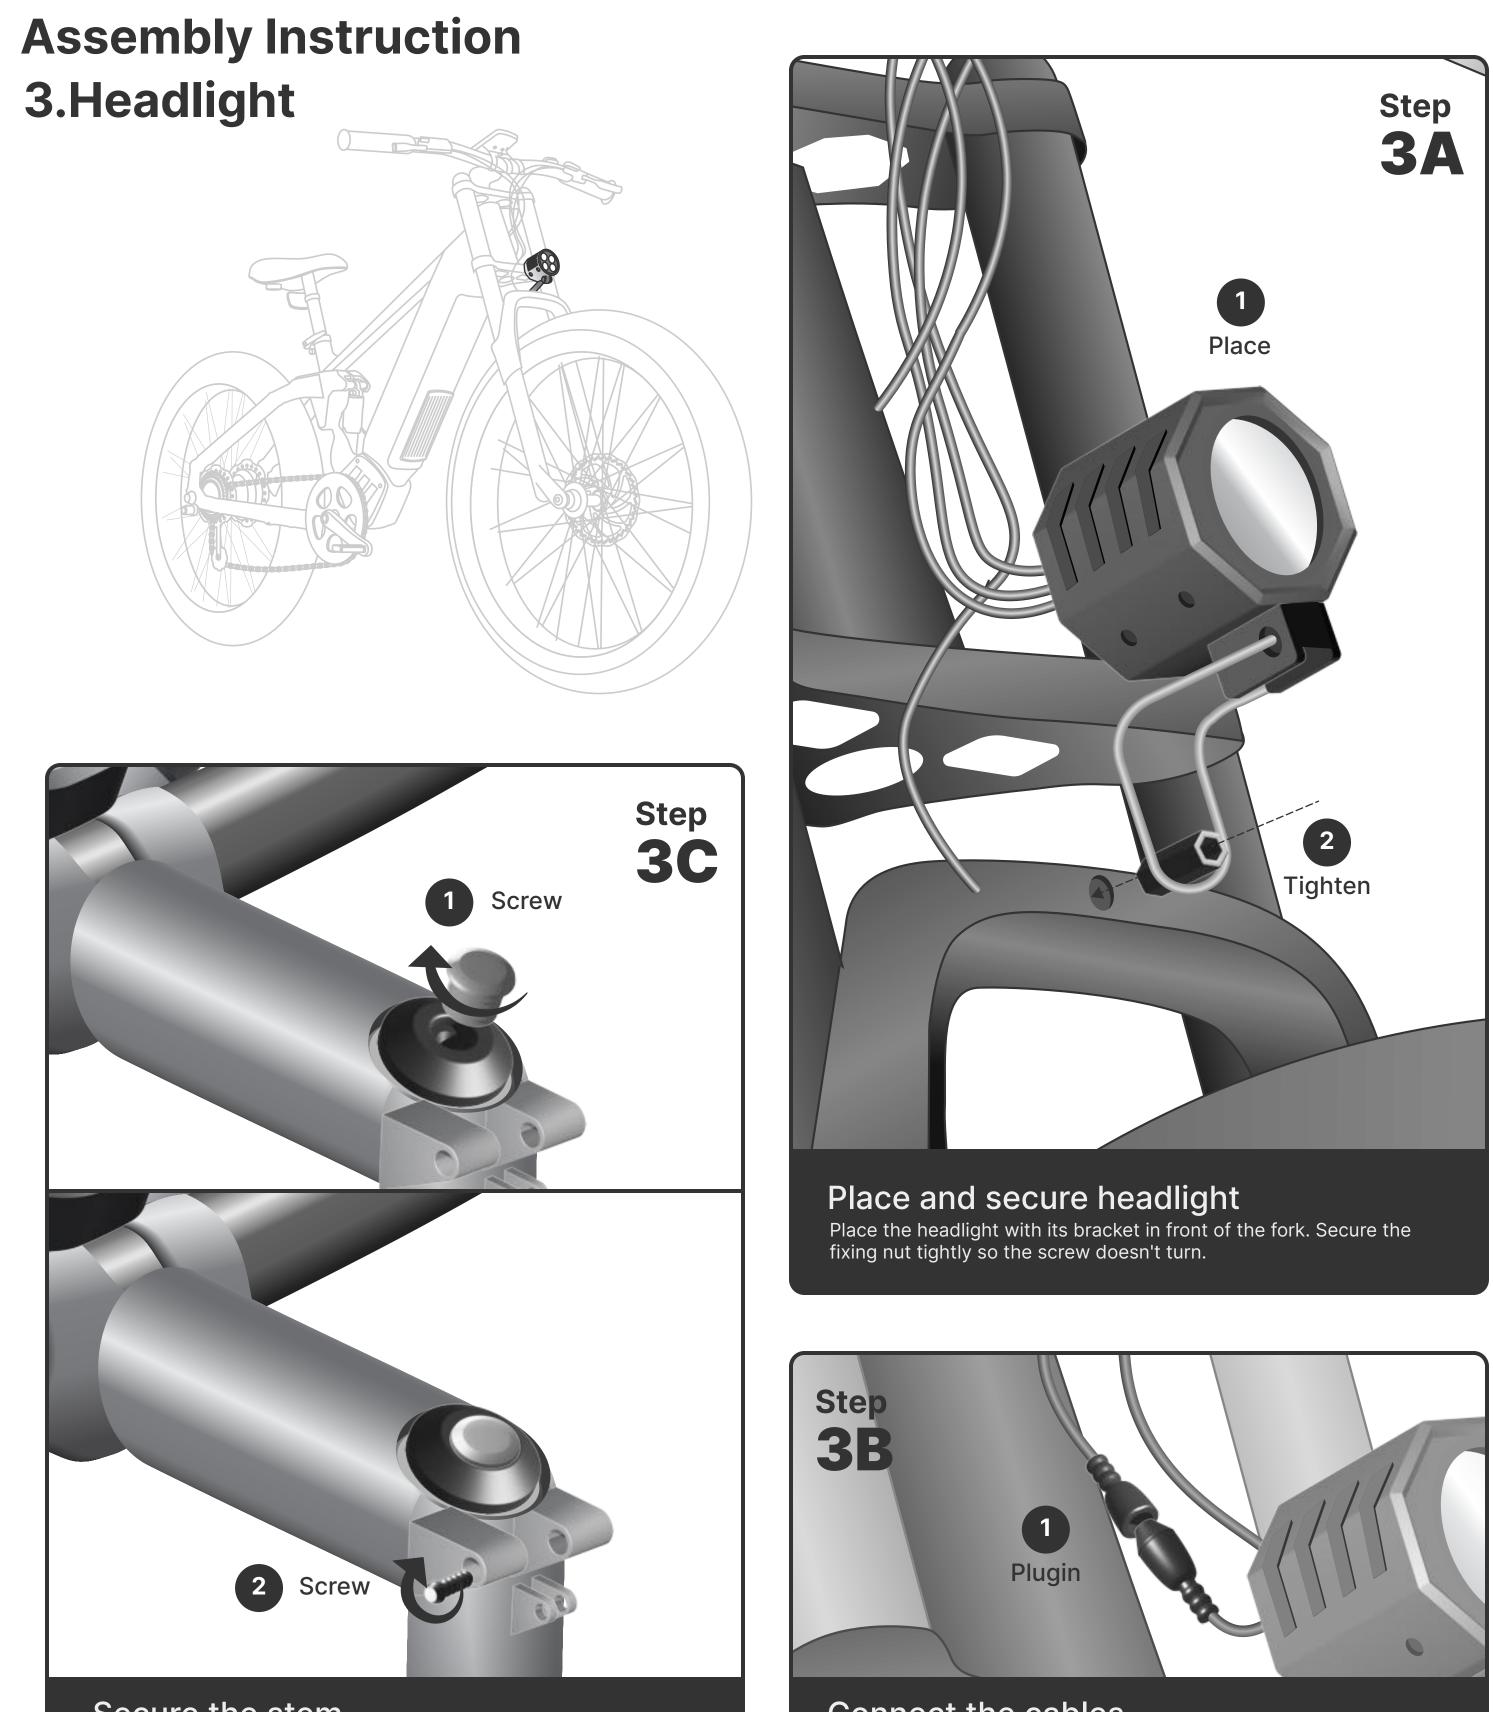


Secure the stem Tighten the screws on the stem end and on top of the stem


Connect the cables Connect the headlight cable to the battery wire. Ensure the front tire aligns with the headset.

Assembly Instruction 4.Pedals



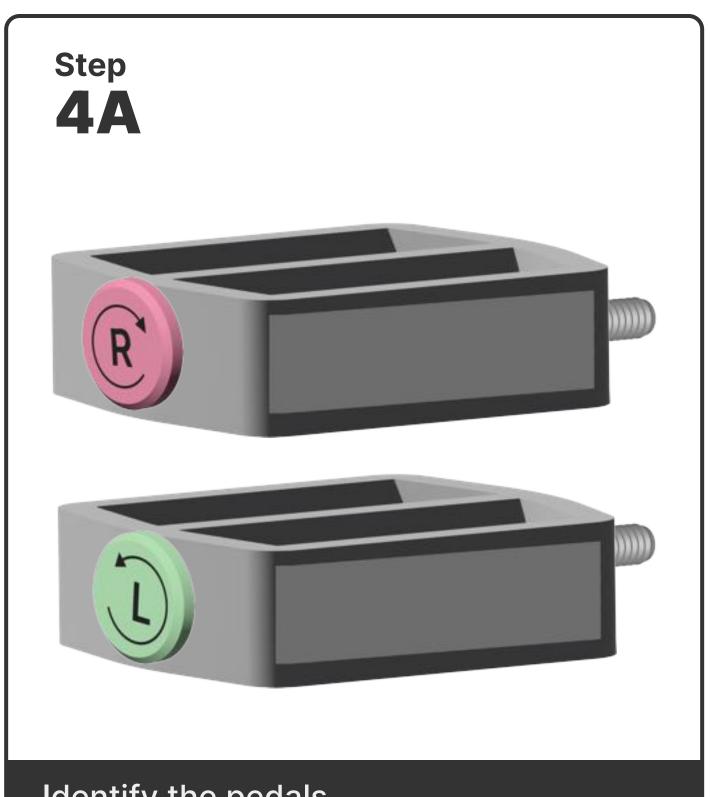

Identify the pedals Identify the left and right markings on the pedals before installing.

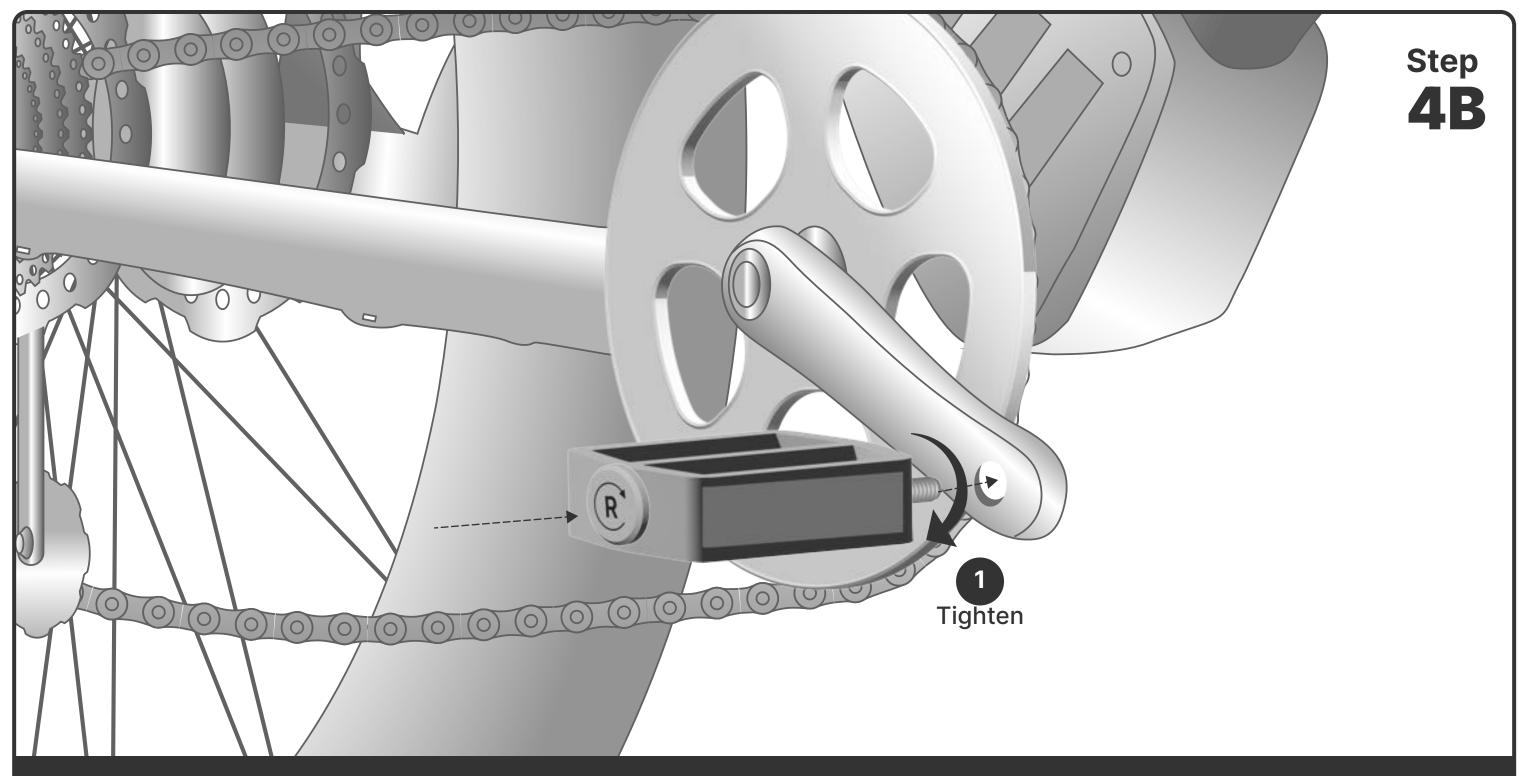


Secure the pedals


Keep the pedal horizontal and hand screw to start. Tighten with a wrench. Both pedals tighten towards the front; the left pedal is reverse threaded.



Warning Incorrect installation will cause damage. The pedals need to be very tight so be sure to retighten them after your firscouple of ride.

Assembly Instruction 5.Seat

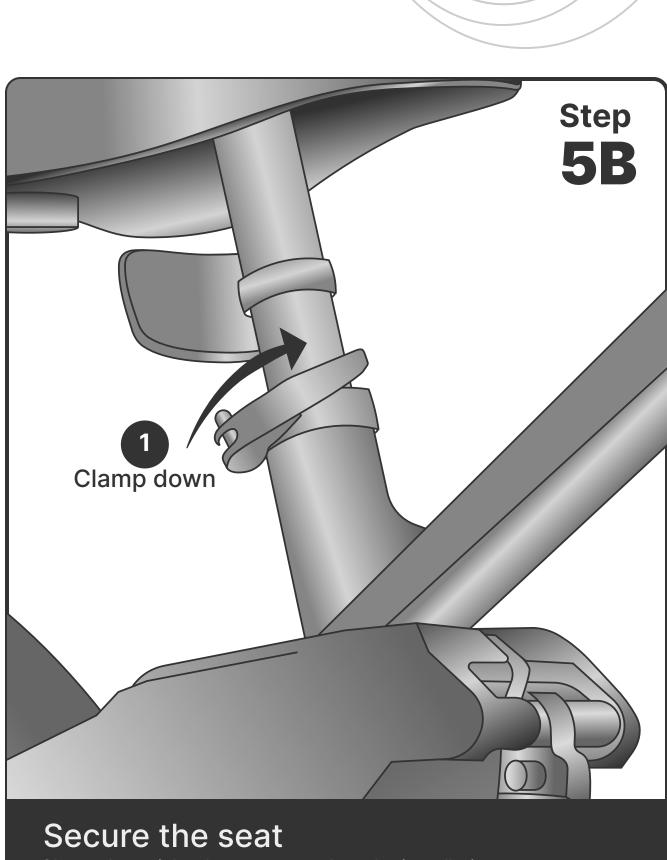


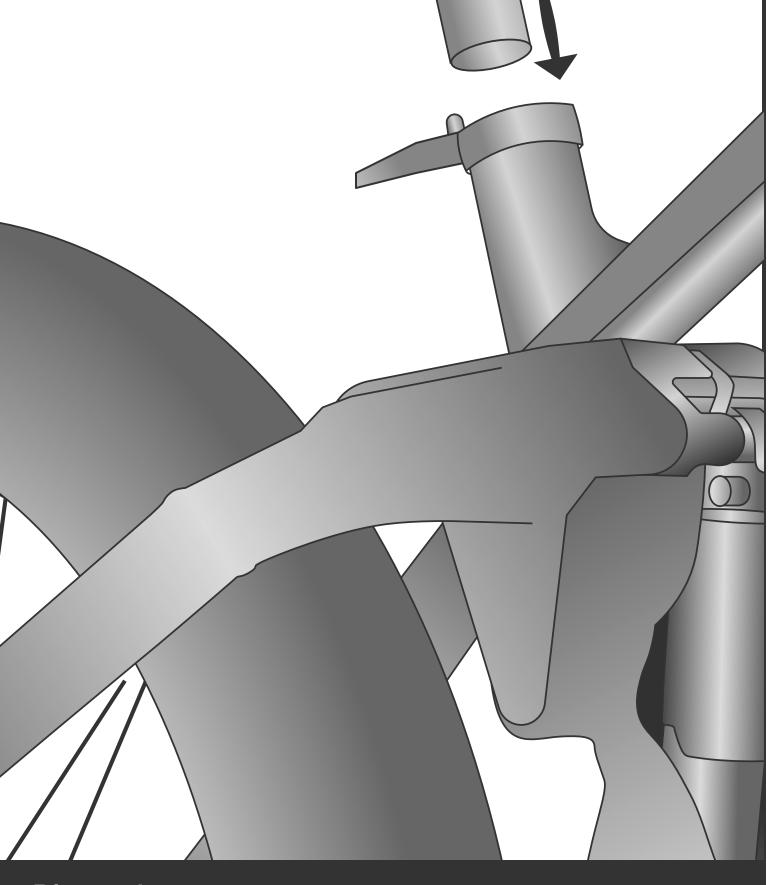

Place the seat Install the seat on the section


Clamp the quick release to complete the installation

Assembly Instruction 6.Battery

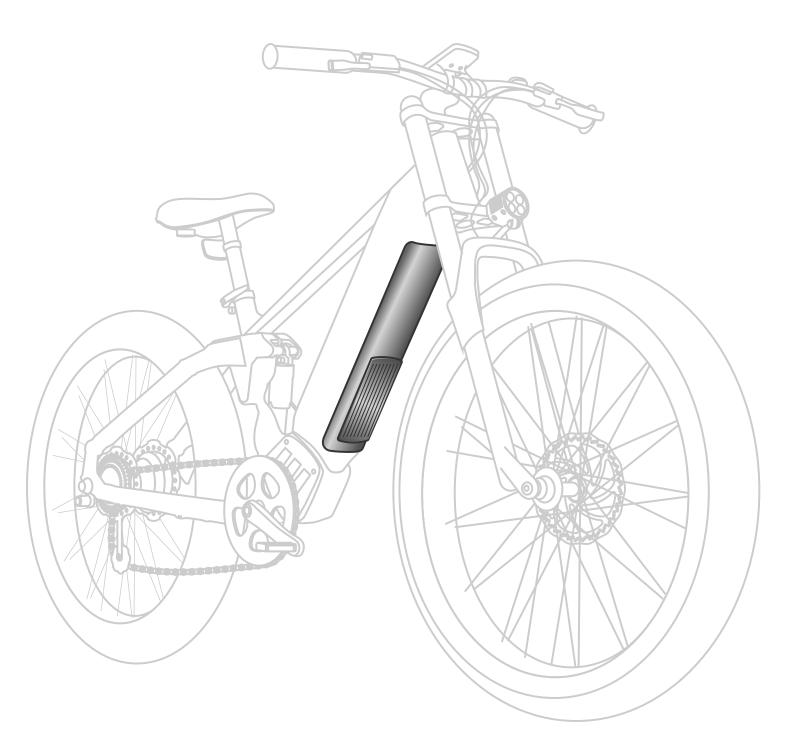



Prepare the battery Charge your battery fully in preparation for your first ride

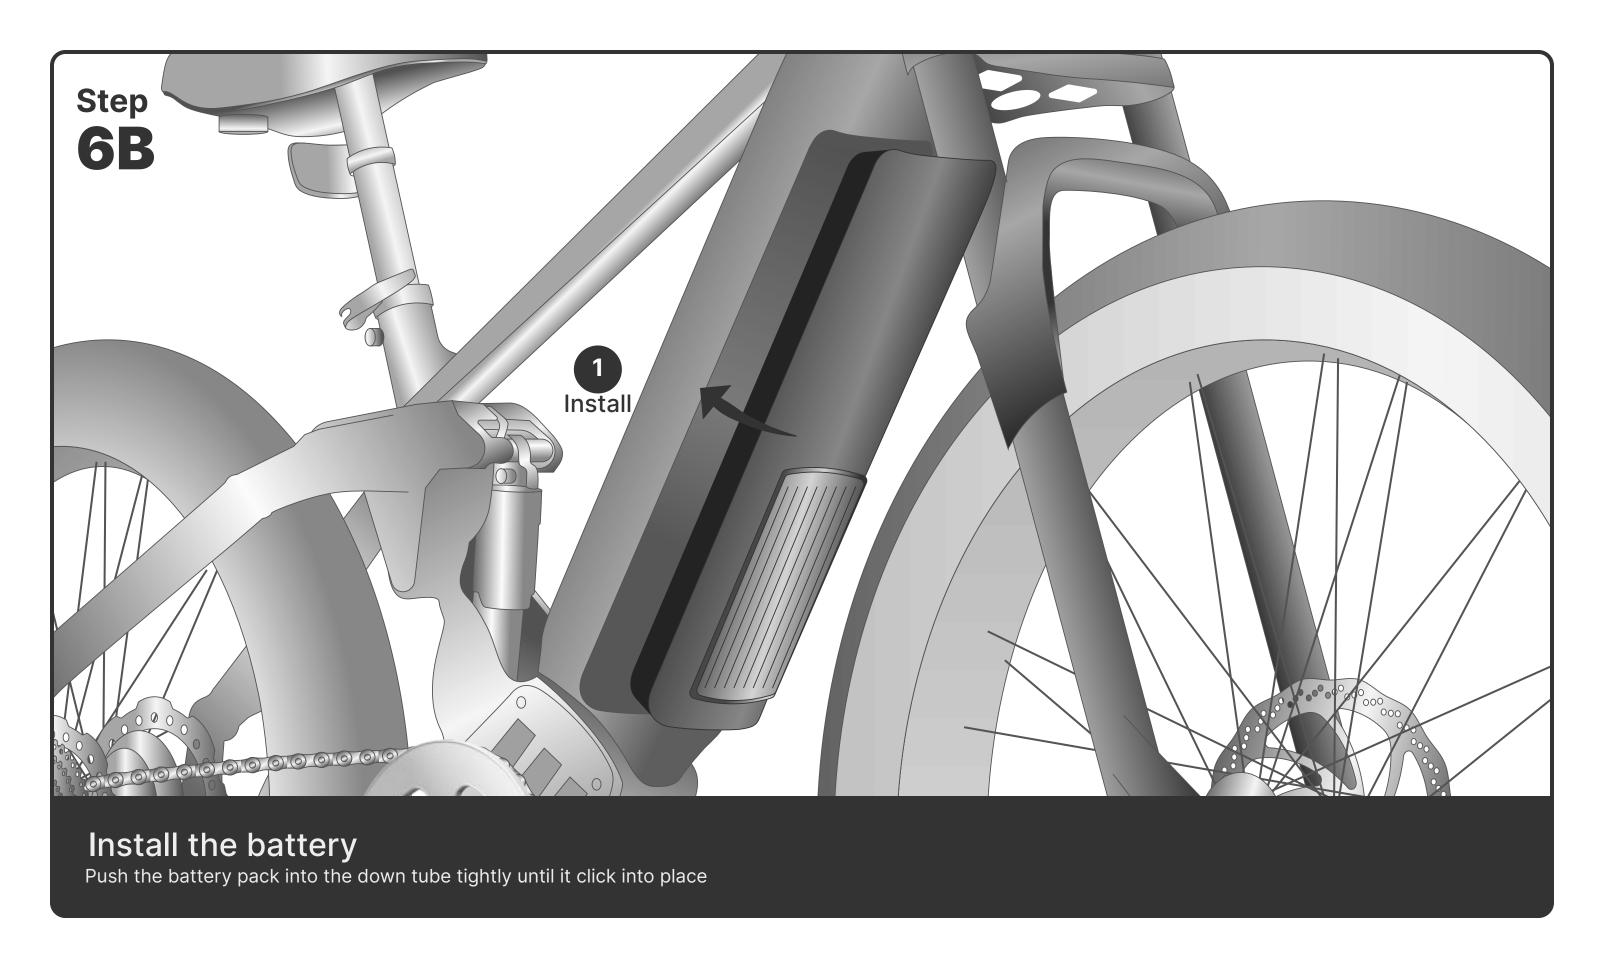

Need Help? Please email support@kandiamerica.com or call 866-GO-KANDI